




# PROSUPPORT SLIM AND LEVELLER



**PSTSB 04**  
spacer thickness 4 mm



**PSTSB 02**  
spacer thickness 2 mm

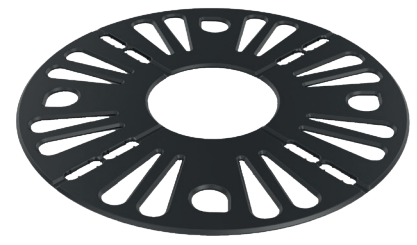

**PSTSL 02**  
leveller thickness 2 mm

## DESCRIPTION

**PROSUPPORT SLIM BASE AND LEVELLER** are modular supports that allow the installation of raised external floating floors. The supports have a minimum height of 10 mm (only the base) and can be superimposed up to a maximum height of 40 mm.

## MATERIAL

**PROSUPPORT SLIM BASE AND LEVELLER** allow the installation of external floating floors. The base, made of polypropylene, has a diameter of 150 mm and a height of 10 mm and is equipped with 4 spacers arranged in cross. The spacers have a length of 13 mm, a height of 14 mm and a thickness of 2 or 4 mm. The bases can be superimposed up to a maximum of 4 pieces. The leveler, made of polystyrene, has a diameter of 150 mm and a thickness of 2 mm. The levellers can be installed up to a maximum of 4 levelers per base. On the supports it is possible to install an anti-noise and anti-slip rubber disc of 1.5 mm thickness.

## AREAS OF APPLICATION

**PROSUPPORT SLIM BASE AND LEVELLER** is suitable for the realisation of floating external floors from a minimum fixed height of 10 mm to a maximum of 40 mm su cement screeds, smoothed concrete, wooden floors not subject to flexion and old floors.

## WARNINGS

Do not use **PROSUPPORT SLIM BASE AND**

**LEVELLER** on concrete polymer sheaths, on lightened screeds and on non-bearing supports and subject to large bending. Do not use in environments subject to vehicular traffic.


## MAINTENANCE

**PROSUPPORT SLIM BASE AND LEVELLER** does not require special maintenance. For its cleaning it is recommended to use normal household products.

## INSTALLATION INSTRUCTIONS

Before starting the installation of the supports for the realisation of floating floors, it is recommended to verify that the substrate is properly waterproofed, has the appropriate slopes, is load-bearing and not subject to bending.

- 1) Carefully clean the laying surface.
- 2) Place the supports according to the size of the floor.
- 3) If a higher thickness is required, apply the leveller up to a maximum of four.
- 4) Lay the floor.
- 5) During installation check that the floor is stable;

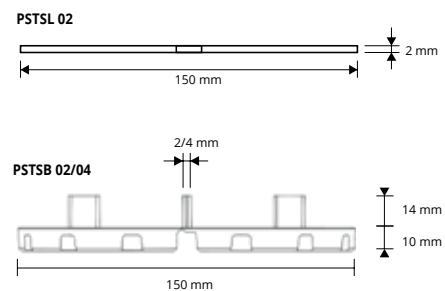

## TEXT TEMPLATE FOR TENDERS

Supply and installation of supports for the floating laying of external floorings, made of polypropylene, 150 mm in diameter and 10 mm high, equipped with 4 cross-shaped spacers. The spacers, 13 mm long, 14 mm high, have a thickness of 2 or 4 mm. You can reach the maximum height of 40 mm using overlapping bases with a diameter of 150 mm and the levellers of 2 mm thickness as **PROSUPPORT SLIM BASE AND LEVELLER** of the company Progress Profiles.

**PSTSB 02 / 04:** Prosupport Slim Base  
**PSTSL 02:** Leveller

Number of supports: \_\_\_\_\_ pcs  
Number of levellers: \_\_\_\_\_ pcs  
Material: \_\_\_\_\_ €/mt  
Installation : \_\_\_\_\_ €/mt  
Total: \_\_\_\_\_ €/mt